


System Cabinet type 10X

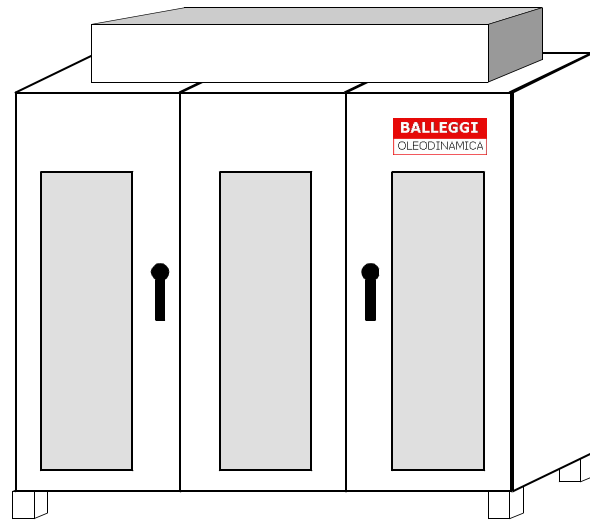

System Cabinet type 20X

Type ARM	Motor Power [KW]	Speed [N/min]	Flow [l/min]	Pmax continuous [atm]	A [mm]	B [mm]	C [mm]	Weight max [kg]
101	18,5 / 55	1470	51 / 140	350	1500	1000	2300	1300
102	55 / 90	1470	140 / 255	350	1500	1000	2300	1500
103	90 / 132	1470	255 / 350	350	1600	1200	2600	1800
201	2x(18,5/55)	1470	2x(51 / 140)	350	2250	1000	2300	2100
202	2x(55 / 90)	1470	2x(140 / 255)	350	2250	1000	2300	2300
203	2x(90 / 132)	1470	2x(255 / 350)	350	2400	1200	2600	2500
204	2x250	1470	2x500	350	3100	1250	2900	5500

Standard version

- IP 55 protection
- Integrated control with variable flow
- Antivibration
- AISI Tank
- AISI water/oilHeat exchanger
- Multiple contact thermostat
- Monitored myronics filters
- Pressure control point
- IP65 Electric panel
- Test before delivery

Available version (upon request)

- Protezione antideflagrante
- Thermoelectric control
- Advanced control system
- Continous pressuremonitoring
- NO STOP filters maintenance
- Minimum oil level control
- Antipulse system
- Heavy duty conditions
- Operation condition -20°C ÷ + 40 °C
- Outdoor applications
- Air/oil heat exchanger

Oleodinamica Balleggi S.a.s. di Balleggi L. & C.
Via Curtatone 3, 20019 Settimo Milanese MI

Tel.: +39 02.48.92.06.84 / 02.48.92.63.51 Fax.: +39-02.47.99.48.67
E-mail: info@oleodinamica-balleggi.com; www.oleodinamica-balleggi.com